



The IP-67 certified enclosure.

SCIENTIFIC THERMAL INFRARED CAMERA.

The M350 is a cooled, high-performance scientific thermal infrared camera designed to provide excellent image quality and impressive thermal sensitivity. It features our unique real-time calibration and is an excellent choice for a variety of scientific and industrial applications.

KEY BENEFITS

HIGH FRAME RATE

Maximum data throughput is larger than 1 Gigabit/s. High performance electronics produce thermal images at rates of up to 355 fps in full-frame mode. Sub-windows can be acquired at rates up to 4 980 fps.

HIGH-SPEED INTERNAL MEMORY

1 GB (expandable) memory for autonomous operation.

HIGH SENSITIVITY

Temperature differences as small as 20 mK are detectable.


ADVANCED CALIBRATION

Unique proprietary real-time processing of infrared images including NUC, radiometric temperature, automated exposure control (AEC) and enhanced high-dynamic-range imaging (EHDMI).

With these unique features, scientists benefit from ease of use and operation flexibility while getting accurate measurements over the entire camera's operation range.

EXAMPLES OF TYPICAL USES

IR signature

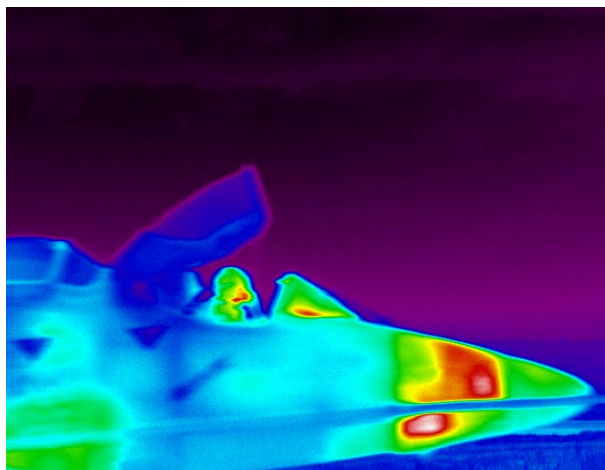

Target ranging



FAST M350	
SPECIFICATIONS	M350
DETECTOR TYPE	Cooled InSb
SPECTRAL RANGE	1.5 μm to 5.4 μm
SPATIAL RESOLUTION	640 \times 512 pixels
DETECTOR PITCH	15 μm
APERTURE SIZE	F/3 (other available)
FRAME RATE	355 Hz
MAXIMUM FRAME RATE	672 Hz @ 320 \times 256 4 980 Hz @ 132 \times 4
TYPICAL NETD	20 mK
EXPOSURE TIME	0.5 μs to full frame rate
LENS MOUNT	Bayonet interface



Jet engine IR signature measurement



Helicopter IR signature characterization

OTHER SPECS & FEATURES	
Rotary-stirling closed cycle sensor cooling	Gig-E
Blackbody-free permanent calibration (up to 150 °C)	Camera Link
Calibration up to 2 500 °C (optional)	Trigger In, Trigger Out
16 bits dynamic range	SDI, GPS, IRIG-B, RS232 and thermistor ports
High-speed internal memory buffer: up to 32 GB	Lock-In (optional)
Automatic exposure control (AEC)	Weight: < 6 kg
Enhanced high-dynamic-range imaging (EHDR)	Size w/o lens: 12.6" \times 7.8" \times 6.9" 321 mm \times 199 mm \times 176 mm

FOR MORE INFORMATION | TELOPS.COM

TELOPS HEADQUARTERS
 contact@telops.com
 Tel.: +1 (418) 864-7808

TELOPS USA
 vince.morton@telops.com
 Tel.: +1 (831) 419-7507

TELOPS EUROPE
 eric.guyot@telops.com
 Tel.: +33 1 70 27 71 34

TELOPS CHINA
 luoyi@telops.com
 Tel.: +86 139 1065 8965