


MULTISPECTRAL INFRARED CAMERAS.

The MS-IR infrared camera allows the scene to be split into eight different spectral bands rather than only one broadband image, thus enabling spectral signature analysis. The filter wheel is a fast-rotating mechanism designed to maximize the cameras' frame rate. Rotating speed is adjustable up to 100 Hz per filter, allowing a frame rate up to 800 fps in a synchronised mode.

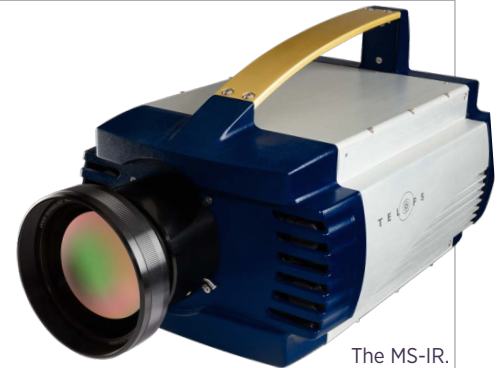

The MS-IR.

KEY BENEFITS

MULTISPECTRAL CAPABILITIES

Performs 8-channel multispectral analysis using a high-speed filter wheel. In fast-rotating mode, the image acquisition is synchronised so that one image per filter is acquired. The filter wheel can also be used in static mode.

HIGH DYNAMIC RANGE

Unique Telops proprietary non-linearity correction and exposure time independent calibration algorithms ensure observation of scene targets with the highest possible contrast and accuracy.

In addition, optional fast automated attenuation filter mechanisms can be added to measure scenes with extreme temperature variations.



ADVANCED CALIBRATION

Real-time processing of infrared images including NUC, radiometric temperature, in-band radiance, automated exposure control (AEC) and enhanced high dynamic range imaging (EHDMI). With these unique features, scientists benefit from ease of use and operation flexibility while getting accurate measurements over the entire camera's operation range.

HIGH SENSITIVITY

Temperature differences as small as 20 mK are detectable.


EXAMPLE OF A TYPICAL USE

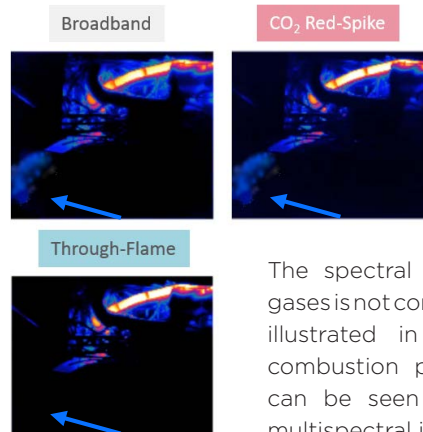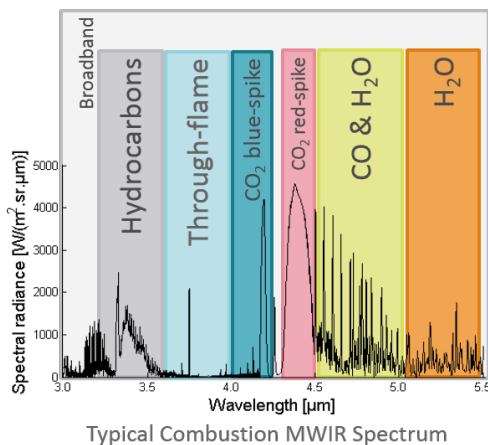

The spectral emissivity of typical combustion gases is not constant as a function of wavelength as illustrated in the MWIR spectra of typical combustion products. These spectral features can be seen in real time with time-resolved multispectral imaging.

| MS M1k | |
|--|--------------------------------------|
| SPECIFICATIONS | |
| DETECTOR TYPE | Cooled InSb |
| SPECTRAL RANGE | 1.5 μm to 5 μm |
| SPATIAL RESOLUTION | 640 \times 512 pixels |
| DETECTOR PITCH | 25 μm |
| APERTURE SIZE | F/2.5 |
| MAXIMUM FRAME RATE IN FULL WINDOW (STATIC FILTER WHEEL MODE) | 1 012 Hz |
| MAXIMUM FRAME RATE IN SUBWINDOW (STATIC FILTER WHEEL MODE) | 40 000 Hz @ 64 \times 8 |
| MAXIMUM FRAME RATE IN ROTATING FILTER WHEEL MODE | 800 Hz |
| MINIMUM EXPOSURE TIME | 0.3 μs in full frame |
| TYPICAL NETD | 25 mK |
| LENS MOUNT | Bayonet interface |

Specifications are subject to change without notice. Other configurations are available upon request.

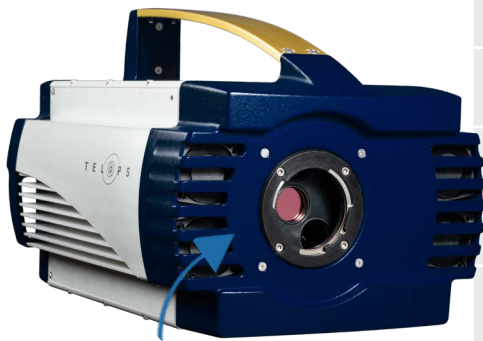

The motorized 8-filter wheel.

| COMMON SPECS | |
|----------------------------------|---|
| SENSOR COOLING | Rotary-stirling closed cycle |
| STANDARD SCENE TEMPERATURE RANGE | Up to 1500 °C Other ranges available. |
| DYNAMIC RANGE | 16 bits |
| MEASUREMENT ACCURACY | 2 K or 2 % (°C) from 0°C to 1500°C |
| MULTISPECTRAL FILTER WHEEL | 8 \times 1" filters; static or fast-rotating mode |
| SIZE W/O LENS | 13.8" \times 8.5" \times 9.3" 352 mm \times 216 mm \times 236 mm |
| WEIGHT W/O LENS | < 13 kg |

FOR MORE INFORMATION | TELOPS.COM

TELOPS HEADQUARTERS
contact@telops.com
Tel.: +1 (418) 864-7808

TELOPS USA
vince.morton@telops.com
Tel.: +1 (831) 419-7507

TELOPS EUROPE
eric.guyot@telops.com
Tel.: +33 1 70 27 71 34

TELOPS CHINA
luoyi@telops.com
Tel.: +86 139 1065 8965